


MC LUMINARY CABLE™

Lighting and low voltage circuits in one cable


For use with LED and Fluorescent dimming and SMART Buildings

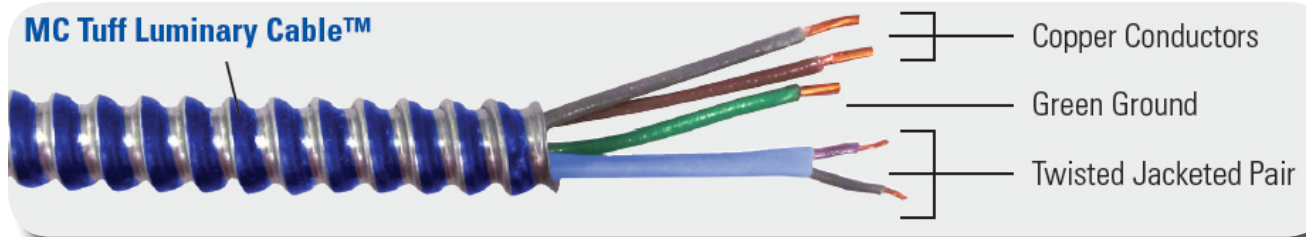

DESCRIPTION

16-2 (1TPJ) Purple, Gray 12-2 Black, White, Green
16-2 (1TPJ) Purple, Gray 12-2 Brown, Gray, Green

- Armor: Galvanized Interlocking Steel Strip (blue striped) or Interlocking Aluminum Strip
- Solid or Stranded Copper Conductors
- Insulated Conductor Type THHN or TFN
- Neutral Conductor: White or Gray
- Control Cables: 16 AWG Twisted jacketed pair (Purple/Gray)
- **Permits conductors of control circuits to be placed in a cable with conductors of electric light, power, or Class 1 circuits**

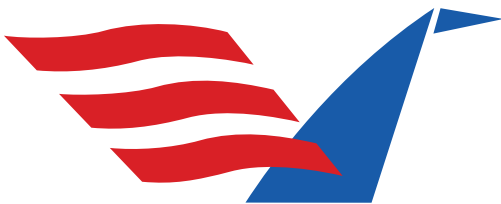

AFC

CABLE SYSTEMS

REFERENCES & RATINGS

- UL 66, 83, 1479, 1569, 1581, 2556, File Reference E80042
- NEC® 250.118, 300.22(C), 392, 396, 330, 501, 502, 503, 530, 504, 505, 518, 520, 530, 645, 725
- Federal Specification A-A-59544 (formerly J-C-30B)
- Meets all applicable OSHA and HUD Requirements
- May be surface mounted, fished and/or embedded in plaster
- Cable Tray Rated, install per NEC®
- UL Classified 1, 2, and 3 hour through penetration (Fire Stop) product, R 14141
- Environmental Air-Handling Space Installation per NEC® 300.22(C)
- Made in USA of US and/or imported materials

Now Stocking in Harrisburg CDC